

CLOSURE PLAN

CFR 257.102(b)

Ash Pond Complex

Conesville Plant
Conesville, Ohio

October, 2016

Prepared for : AEP Generation Resources – Conesville Plant

Conesville, Ohio

Prepared by: American Electric Power Service Corporation

1 Riverside Plaza

Columbus, OH 43215




GERS-16-012

CLOSURE PLAN
CFR 257.102(b)
CONESVILLE PLANT
ASH POND COMPLEX

PREPARED BY *Brian Palmer* DATE 8-10-2016
Brian Palmer, P.E.

REVIEWED BY *Shah Baig* DATE 8-10-2016
Shah Baig, P.E.

APPROVED BY *Gary F. Zych* DATE 8/22/2016
Gary F. Zych, P.E.
Department Manager – AEP Geotechnical Engineering

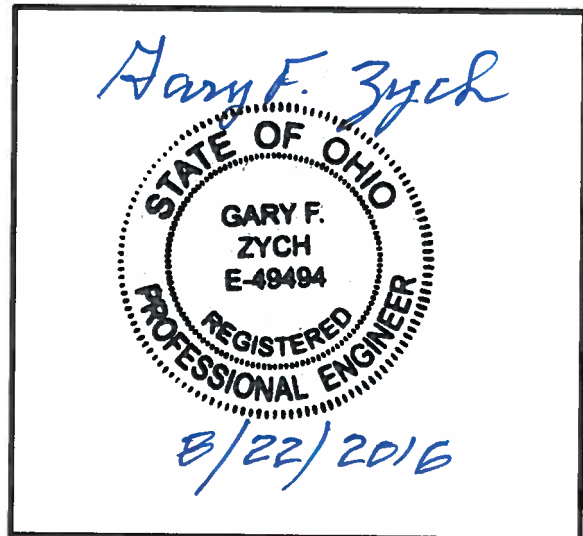

I certify to the best of my knowledge, information, and belief that the information contained in this closure plan meets the requirements of 40 CFR § 257.102

I certify to the best of my knowledge, information and belief that design of the final cover system as described in this closure plan meets the requirements of 40 CFR § 257.102.

Table of CONTENTS

1.0 OBJECTIVE.....	1
2.0 DESCRIPTIONS OF CCR IMPOUNDMENTS.....	1
3.0 DESCRIPTION OF CLOSURE PLAN 257.102(b)(1)(i)	1
4.0 CLOSURE IN PLACE 257.102 (b)(1)(iii).....	1
4.1 CLOSURE PERFORMANCE STANDARDS 257.102 (d)(1).....	2
4.2 DRAINING AND STABILIZING OF THE SURFACE IMPOUNDMENT 257.102(d)(2).....	2
4.3 FINAL COVER SYSTEM 257.102 (d)(3)	3
5.0 ESTIMATE OF MAXIMUM CCR VOLUME 257.102 (b)(1)(iv)	3
6.0 ESTIMATE OF LARGEST AREA OF CCR REQUIRING COVER 257.102 (b)(1)(v).....	3
7.0 CLOSURE SCHEDULE 257.102(b)(1)(vi).....	3

1.0 OBJECTIVE

This report was prepared by AEP- Geotechnical Engineering Services (GES) section to fulfill requirements of CFR 257.102(b) for Closure Plans of Existing CCR Surface Impoundments

2.0 DESCRIPTION OF THE CCR UNIT

The Conesville Generating Station is located near the Village of Conesville, Coshocton County, Ohio. It is owned and operated by AEP Generation Resources. The facility operates one surface impoundment for storing CCR called the Ash Pond Complex.

The Ash Pond Complex is comprised of diked embankments on the north, east, and southwest sides. The west side of the Ash Pond Complex is located adjacent to a closed landfill area. There are three main ponds within the Ash Pond Complex as listed below.

List of Main Ponds within the Ash Pond Complex

Fly Ash Pond
Bottom Ash Pond
Clearwater Pond

3.0 DESCRIPTION OF CLOSURE PLAN 257.102(b)(1)(i)

[A narrative description of how the CCR unit will be closed in accordance with this section]

The Conesville Ash Pond Complex will be closed by closure in place. The closure will consist of re-grading the existing onsite materials and the installation of an impermeable cap with vegetative cover. The existing surface will be graded to achieve a gently sloping surface to promote surface water runoff. The regraded surface will be covered with a flexible geomembrane system and 2-feet of soil fill consisting of an 18" soil infiltration layer and 6" of earthen material that is capable of sustaining native plant growth. The surface soil will be seeded and mulched to promote the growth of a vegetative cover.

4.0 CLOSURE IN PLACE 257.102 (b)(1)(iii)

[If closure of the CCR unit will be accomplished by leaving the CCR in place, a description of the final cover system, designed in accordance with paragraph(d) of this section, and the methods and procedures to be used to install the final cover. The closure plan must also discuss how the final cover system will achieve the performance standards specified in paragraph (d) of this section.]

The final cover system will consist of an flexible geomembrane that will have a permeability that is less than or equal to the permeability of the natural subsoils and is no greater than 1×10^{-5} cm/sec. The geomembrane will be installed directly over the graded CCR material. Over the geomembrane will be installed an infiltration layer consisting of 18" of earthen material and an erosion layer consisting of 6" of earthen material that is capable of sustaining native plant growth. The final cover will be seeded and mulched to promote growth of a vegetative cover. The final cover slope will be a minimum of 2% and will convey water to a NPDES permitted outfall.

Prior to installation of the final cover system the impoundment be drained of the free water with the impoundment. The ash and soil material will be graded to provide a stable subgrade for the final cover system.

4.1 CLOSURE PERFORMANCE STANDARDS 257.102 (d)(1)

4.1.1 SECTION 257.102(d)(1)(i)

[Control, minimize or eliminate, the maximum extent possible extent feasible, post-closure infiltration of liquids into the waste and releases of CCR, leachate, or contaminated run-off to the ground or surface waters or to the atmosphere.]

The final cover system will cover the CCR material and will have a permeability that is less than or equal to the permeability of the natural subsoils and is no greater than 1×10^{-5} cm/sec.

4.1.2 SECTION 257.102(d)(1)(ii)

[Preclude the probability of future impoundment of water, sediment, or slurry.]

The impoundment will gently graded to a minimum slope of 2% to prevent the ponding of water sediment or slurry.

4.1.3 SECTION 257.102(d)(1)(iii)

[Include measures that provide for major slope stability to prevent the sloughing or movement of the final cover system during the closure and post-closure care period.]

The final cover system will be gently graded with a minimum of 2% slope. The final configuration of the impoundment will meet the stability requirements to prevent the sloughing or movement of the final cover system during the closure and post-closure care period.

4.1.4 SECTION 257.102(d)(1)(iv)

[Minimize the need for further maintenance of the CCR unit.]

The impoundment will be vegetated to prevent erosion. Maintenance of the final cover system will include mowing.

4.1.5 SECTION 257.102(d)(1)(v)

[Be completed in the shortest amount of time consistent with recognized and generally accepted good engineering practices.]

The CCR unit will be closed in a timeframe consistent with recognized and generally accepted good engineering practices. There is currently no schedule for closure of this CCR unit.

4.2 DRAINING AND STABILIZING OF THE SURFACE IMPOUNDMENT

257.102(d)(2)

[The owner or operator of a CCR surface impoundment of any lateral expansion of a CCR surface impoundment must meet the requirements of paragraph (d)(2)(i) and (ii) of this section prior to installing the final cover system required under paragraph (d)(3) of this section.]

4.2.1 SECTION 257.102(d)(2)(i)

[Free liquids must be eliminated by removing liquid wastes or solidifying the remaining wastes and waste residue.]

As part of closure of the CCR unit, all free water will be removed.

4.2.2 SECTION 257.102(d)(2)(ii)

[Remaining waste must be stabilized sufficient to support the final cover system.]

The remaining waste that make up the subgrade of the final cover system will be stabilized by removal of free liquids and providing bridging as necessary.

4.3 FINAL COVER SYSTEM 257.102 (d)(3)

[If a CCR unit is closed by leaving CCR in place, the owner or operator must install a final cover system that is desgined to minimize infiltration and erosion , and at a minimum, meets the requirements of paragraph (d)(3)(i) of this section, or the requirements of the alternative final cover system specified in paragraph (d)(3)(ii) of this section.

The final cover system must be designed and constructed to meet the criteria in paragraphs (d)(3)(i)(A) through (D) of this section. The design of the final cover system must be included in the written closure plan.]

The final cover system will consist of a composite liner system (flexible geomembrane and cover soil layers). The geomembrane will have a permeability that is less than or equal to the permeability of the natural subsoils and is no greater than 1×10^{-5} cm/sec. The geomembrane will be installed directly over the graded CCR/soil subgrade. The cover soil layers will be installed over the geomembrane and consists of 18-in of earthen material as a protective/infiltration layer and a vegetative layer consisting of 6-in of earthen material that is capable of sustaining native plant growth. The final cover will be seeded and mulched to promote growth of a vegetative cover. The final cover slope will be a minimum of 2% and will covey storm water to a permitted outfall. The final cover slope will be a minimum of 2% to accommodate settling and subsidence.

5.0 ESTIMATE OF MAXIMUM CCR VOLUME 257.102 (b)(1)(iv)

[An estimate of the maximum inventory of CCR ever on-site over the active life of the CCR unit.]

Not knowing all operational history the maximum CCR inventory in the Ash Pond Complex would be approx. 2,470 acre-ft. Current CCR material in place is approximately 1,160 acre-ft.

6.0 ESTIMATE OF LARGEST AREA OF CCR REQUIRING COVER 257.102 (b)(1)(v)

[An estimate of the largest area of CCR unit ever requiring a final cover

The largest area of the CCR unit ever requiring a final cover is 96 acres.

7.0 CLOSURE SCHEDULE 257.102(b)(1)(vi)

[A schedule for completing all activities necessary to satisfy the closure criteria in the section, including an estimate of the year in which all closure activities for the CCR unit will be completed. The schedule should provide sufficient information to describe the sequential steps

that will be taken to close the CCR unit, including identification of major milestones such as coordinating with and obtaining necessary approvals and permits from other agencies, the dewatering and stabilization phases of the CCR surface impoundment closure, or installation of the final cover system, and the estimated timeframes to complete each step or phase of the CCR unit closure.

At this time there are currently no plans to close this CCR unit. Once the CCR unit requires closure a schedule to satisfy this section will be prepared.